


SAMENSTELLING DEKVLOER


Dekvloeren

SAMENSTELLING


WATERDOORLATEND

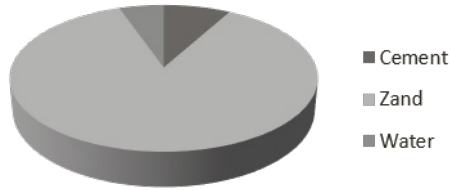

TRADITIONEEL

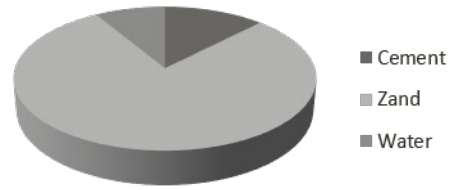

VERSTERKT

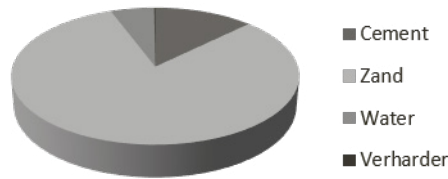

KENMERKEN

WATERDOORLATEND

TRADITIONEEL

VERSTERKT

CEM III 32,5	(75) - 150 kg	(230) - 250 kg	250 kg
Zand 0/4 (0/7)	1600 kg	1600 kg	1600 kg
Water	+ (50) - 100 liter (+ 70% W/C-factor)	+ (160) - 175 liter (+ 70% W/C-factor)	+ 110 liter (+ 45% W/C-factor)
Verharder	-	-	2,5 liter (1% W/C-factor)
Kwaliteit	(C3/F1) - C5/F1 N/mm ²	min. C8/F2 N/mm ²	min. C20/F4 N/mm ²
Minimumdikte (hechtend)	50 mm	50 mm	30 mm
Minimumdikte (niet-hechtend)	nvt	50 mm	40 mm
Minimumdikte (zwevend)	nvt	50 mm	40 mm
Minimumdikte (vloerverwarming)	nvt	75 mm (incl. 25 mm leidingen)	55 mm (incl. 25 mm leidingen)

WATERDOORLATENDE TOEPASSINGEN

